


Type 92C Self-Powered Control Valve



TYPE 92C PRESSURE-LOADED CONTROL VALVE

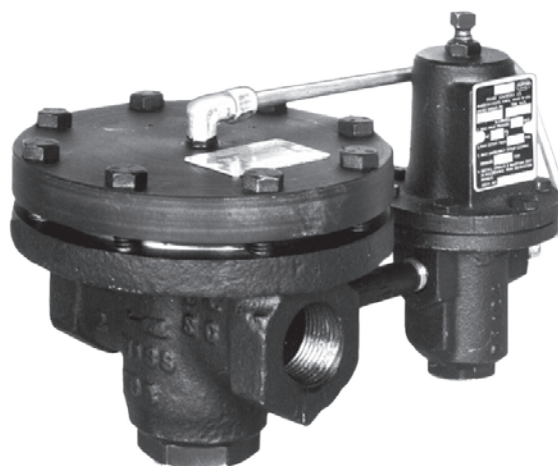

TYPE 92C SELF-POWERED CONTROL VALVE WITH TYPE 6392 PILOT

Figure 1. Type 92C Pressure Regulator

Introduction

The Type 92C regulator (Figure 1) is an economical cast iron, steel, or stainless steel pressure-reducing regulator used in steam, liquid or hot air service. This regulator is available with a Type 6392 pilot for use as a pilot-operated regulator or without a pilot for use as a pressure-loaded regulator. The pilot-operated version uses inlet pressure as the operating medium; no separate air supply is required. The pressure-loaded version is used where remote adjustment of the regulator pressure setting is required; a Type 67, 1301F regulator, or a 670 panel loader can be used as the loading regulator.

A Type 6492HM or 6492HTM safety override pilot is also available for the Type 92C. The Type 6392 pilot is used in a series installation with the Type 6492HM or 6492HTM safety override pilot installed on the upstream valve. The Type 6492HM or 6492HTM

safety override pilot senses pressure downstream of the second valve, and prevents pressure from rising above safe operating pressure in the event the downstream valve fails. This system is approved by ASME B31.1-1989, 122.14.2.A, and can replace an ASME safety valve when vent piping is not practical and upstream pressure does not exceed 400 psig (27,6 bar). Local codes and standards may require approval by an appropriate authority prior to installation.

Features

- **Shutoff Performance**—The machine-lapped, flat-face seating surfaces featured in the Type 92C regulator and Type 6392 pilot design have been time-proven to minimize seat leakage when downstream demand is zero and the regulator is shutoff.



Specifications

Body Sizes and End Connection Styles

Cast Iron: 1/2, 3/4, 1 NPT

Steel or Stainless Steel: NPS 1/2, 3/4, or 1
(DN 15, 20, or 25) NPT; CL150 RF; CL300 RF;
or PN 16/25/40

Maximum Allowable Inlet and Pilot Supply Pressures⁽¹⁾

Cast Iron Construction: 250 psig (17,2 bar)

Steel and Stainless steel Construction:
300 psig (20,7 bar)

Regulator Pressure Drops⁽¹⁾

Minimum: 15 psi (1,0 bar)

Maximum Operating: Do not exceed the pressure drops in the capacity tables

Maximum Emergency⁽²⁾

Cast Iron Construction: 250 psi (17,2 bar)

Steel and Stainless steel Construction:
300 psi (20,7 bar)

Outlet Pressure Range

See Table 1

Maximum Outlet Pressures⁽²⁾

Maximum Operating Outlet Pressure:
150 psig (10,3 bar)

Maximum Emergency Outlet (Casing) Pressure

Cast Iron Construction: 250 psig (17,2 bar)

Steel and Stainless steel Construction:
300 psig (20,7 bar)

Loading Pressure For Pressure-Loaded Regulator⁽²⁾

See Figure 5 to determine loading pressure.

Maximum allowable loading pressure⁽²⁾ is 250 psig (17,2 bar) for cast iron construction and 300 psig (20,7 bar) for steel and stainless steel construction; the maximum allowable diaphragm differential pressure of 150 psi (10,3 bar) for cast iron, steel, and stainless steel constructions must not be exceeded

Orifice Sizes

NPS 1/2 (DN 15) Main Valve: 9/16-inch (14 mm)

NPS 3/4 and 1 (DN 20 and 25) Main Valves:
3/4-inch (19 mm) is standard; 9/16-inch (14 mm) is optional

Flow Capacity

See Capacity Information section

Flow and Sizing Coefficients

See Tables 2 and 3

Proportional Band

10%

Construction Materials

Type 92C Self-Powered Control Valve

Main Valve Body and Diaphragm Flange: Cast iron, Steel, or Stainless steel

Orifice and Valve Stem: Heat-treated 416 Stainless steel

Main Valve Plug (Metal Seat Construction):
Heat-treated 416 Stainless steel

Main Valve Disk and Disk Holder (Elastomeric Seat Construction) Disk: Ethylenepropylene (EPR)

Disk Holder: Heat-treated 416 Stainless steel

Main Valve Diaphragms and Valve Plug Springs:
Stainless steel

Stem Guides: Heat-treated 416 Stainless steel

Main Valve Plug Guides

Cast Iron Construction: Brass

Steel Construction: Heat-treated 416 Stainless steel

Type 6392 Pilot

Pilot Body and Pilot Spring Case: Cast iron, Steel, or Stainless steel

Pilot Valve Plug (Metal Seat Construction):
Heat-treated 416 Stainless steel

Pilot Valve Disk and Disk Holder (Elastomeric Seat Construction) Disk: Ethylenepropylene (EPR)

Disk Holder: Heat-treated 416 Stainless steel

Pilot Diaphragms: Stainless steel

Pilot Stem Guides: Heat-treated 416 Stainless steel

Pilot Valve Plug Guides

Cast Iron Construction: Brass

Steel Construction: Heat-treated 416 Stainless steel

Pilot Control Spring: 416 or 17-7PH Stainless steel

Pilot Inlet Screen: Stainless steel

Loading Pressure Tubing: Copper (used for pilot operated regulator only) or Stainless steel

Pilot Fittings: Brass or Stainless steel

Pilot Supply Line: Steel pipe nipple

Types 6492HM and 6492HTM Safety Override Pilots

Pilot Valve Body: WCC steel and CF8M Stainless steel

Valve Guide

For Steel Body: 416 Stainless steel

For Stainless steel Body: 316 Stainless steel

Valve Spring: 302 Stainless steel

Orifice

For Steel Body: 416 Stainless steel

For Stainless steel Body: 316 Stainless steel

Valve Stem

For Steel Body: 410/416 Stainless steel

For Stainless steel Body: 316 Stainless steel

- continued -

Specifications (continued)

<i>Diaphragm:</i> 302 Stainless steel <i>Lower Spring Seat</i> For Type 6492HM: Aluminum For Type 6492HTM: Steel or Stainless steel <i>Spring</i> For Type 6492HM: Steel For Type 6492HTM: Stainless steel Upper Spring Seat: Steel Spring Case: Steel or Stainless steel Pipe Plug: Steel or Stainless steel Maximum Material Temperature Capabilities⁽²⁾ Metal Diaphragm and Seat <i>Cast Iron Construction:</i> -40° to 406°F (-40° to 208°C) <i>Steel Construction:</i> -20° to 500°F (-29° to 260°C) <i>Ethylene propylene (EPR) Seat:</i> -40° to 275°F (-40° to 135°C) Optional High-Temperature Steel or Stainless Steel Body: 650°F (343°C)	Pressure Registration With Pilot: External Without Pilot: Internal Downstream Control Line Connection 1/4 NPT (internal) in pilot body (downstream control line not required for pressure-loaded regulator) Loading Pressure Connection 1/4 NPT (internal) in main valve diaphragm flange (this connection is factory-piped to the pilot on pilot-operated regulator) Pilot Spring Case Vent 3/32-inch (2,4 mm) drilled hole Approximate Weights Cast iron, Steel, or Stainless steel Body with Pilot: 20 pounds (9 kg) Cast iron, Steel, or Stainless steel Body without Pilot: 16 pounds (7 kg)
--	---

1. Also see Installation section

2. Pressure/temperature limits in this Bulletin and any application codes must not be exceeded.

Table 1. Outlet Pressure Ranges

SPRING USAGE	OUTLET PRESSURE RANGE PSIG, (bar)	SPRING PART NUMBER AND COLOR	SPRING WIRE DIAMETER, INCHES (mm)	SPRING FREE LENGTH, INCHES (mm)
Standard use up to 500°F (260°C)	5 to 70 (0,34 to 4,8)	1E392627012 Green	0.170 (4,3)	2.00 (50,8)
	20 to 150 (1,4 to 10,3)	1E392727142 Red	0.207 (5,3)	1.94 (49,3)
High-Pressure and/or High Temperature over 500°F (260°C)	15 to 100 (1,0 to 6,9)	14B9941X012 Unpainted	0.192 (4,9)	1.96 (49,8)
	80 to 250 (5,5 to 17,2)	14B9940X012 Unpainted	0.282 (7,2)	

Table 2. Flow Coefficients⁽¹⁾

ORIFICE SIZE, INCHES (mm)	WIDE-OPEN FOR RELIEF SIZING			C ₁	K _m
	C _g	C _s	C _v		
9/16 (14)	170	8.5	5	34	0.67
3/4 (19)	240	12	7.1		

1. C_v = C_s x 20 ÷ C₁

Table 3. IEC Sizing Coefficients

BODY SIZE, NPS (DN)	ORIFICE SIZE, INCHES (mm)					
	9/16 (14)			3/4 (19)		
	X _T	F _D	F _L	X _T	F _D	F _L
1/2 (15)	0.73	0.38	0.82	----		
3/4 or 1 (20 or 25)		0.44		0.73	0.38	0.82

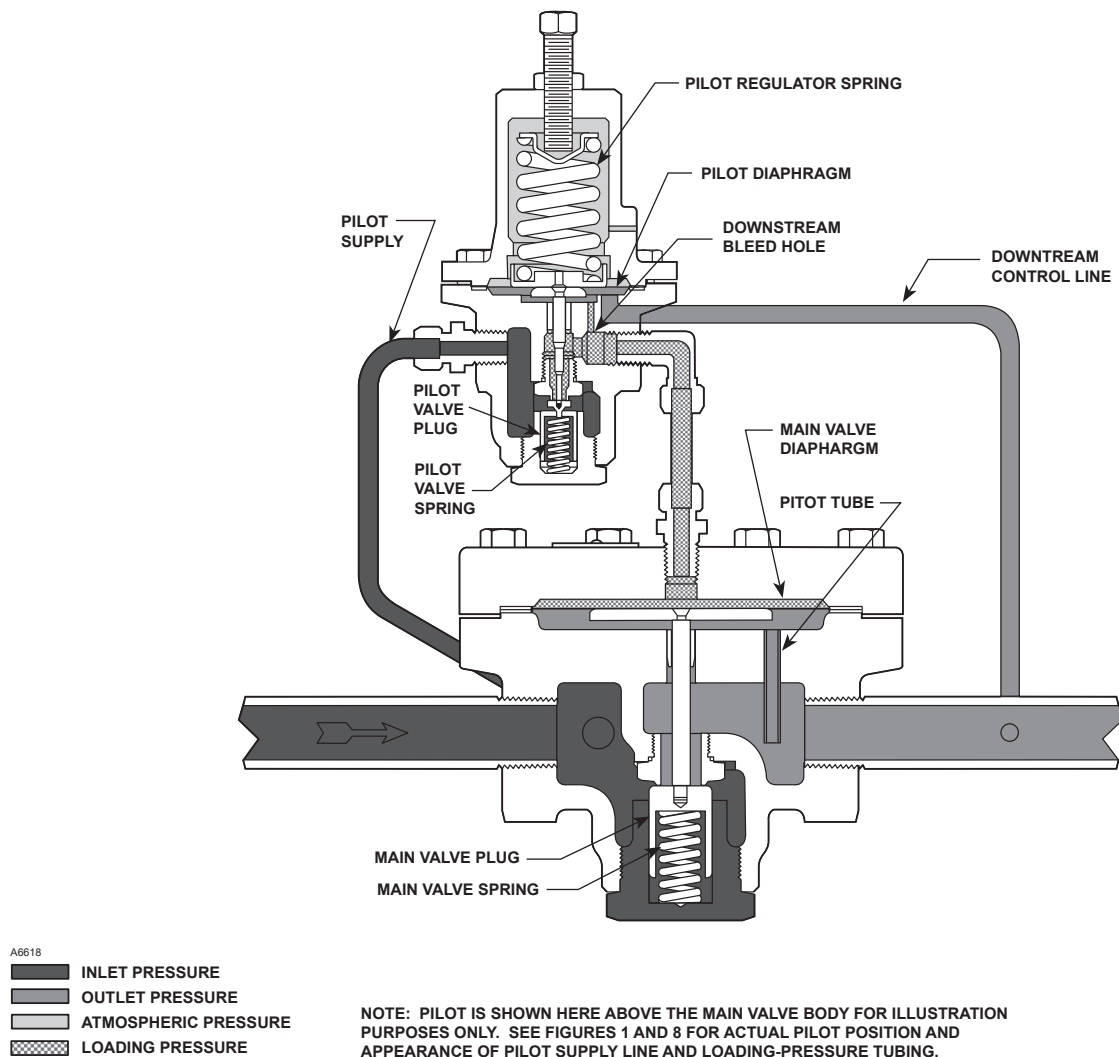


Figure 2. Type 92C with Type 6392 Pilot Operational Schematic

- **Soft Seats**—When tight shutoff is required and service conditions permit their use, elastomer seats are available for ASME Class VI shutoff.
- **Equal Inlet and Outlet Pressure Ratings**—Eliminate the need for overpressure protection for the downstream side of the regulator.
- **Choice of Steel, Stainless steel, or Iron Bodies**—Steel and stainless steel valve construction helps resist piping stresses commonly encountered in steam applications.
- **Ease of Installation**—Lightweight, compact construction is easy to install and requires a minimum space for installation. For pilot-operated regulators, supply pressure to the pilot is supplied from the inlet side of the main valve through piping furnished with the regulator.
- **Ease of Maintenance**—Main valve and pilot valve plug and seat can be removed for inspection or maintenance without disassembling piping connections and without removing the diaphragm. Pilot-inlet screen is easily removed with the seating parts for inspection and cleaning. Diaphragms can be removed without disturbing seating parts.
- **Ease of Conversion**—If application requirements change, the regulator can be converted from a pressure-loaded regulator to a pilot-operated regulator or vice-versa by adding or removing the pilot and pilot piping; no changes to the main valve construction are required.

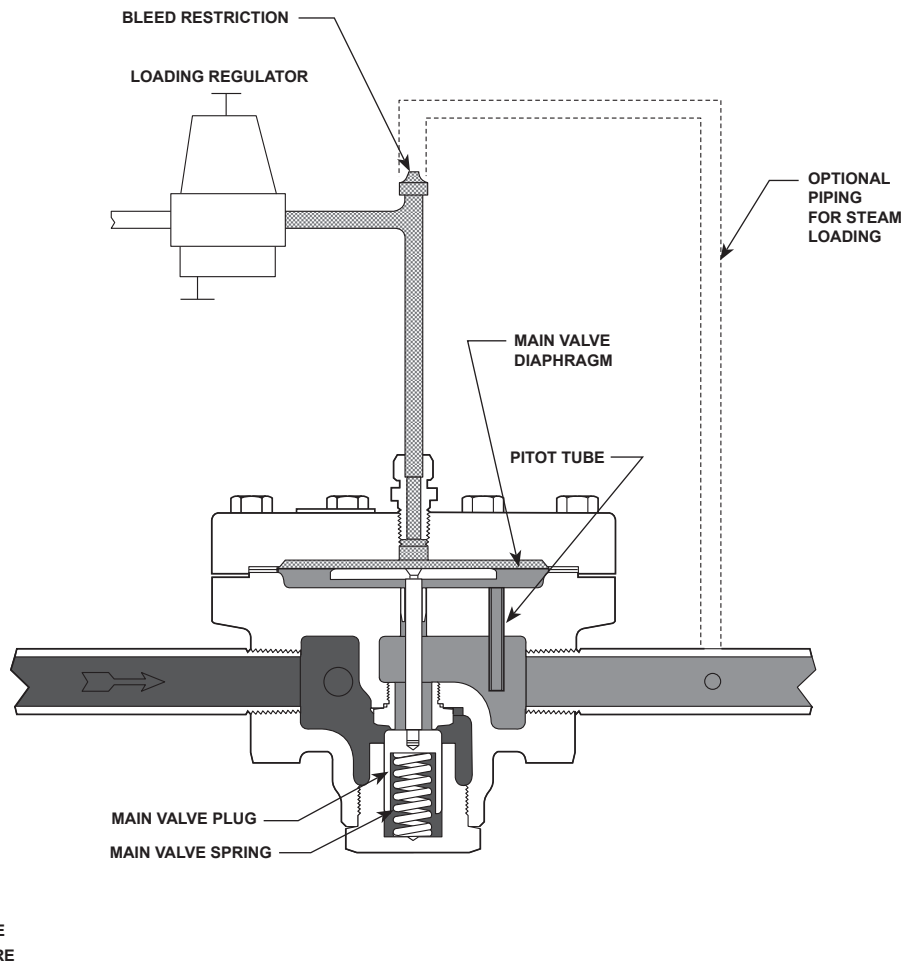


Figure 3. Type 92C Pressure-Loaded Control Valve Operational Schematic

Principle of Operation

Pilot-Operated Regulator

Refer to the schematic in Figure 2. Pilot supply pressure is piped from the inlet side of the main valve to the pilot inlet connection. Downstream pressure registers under the main valve diaphragm through the pitot tube under the pilot diaphragm through the downstream control line.

When downstream pressure decreases to a value below the setting of the pilot regulator spring, the pilot spring forces the pilot valve plug open, increasing the loading pressure on the top of the main valve diaphragm. The increased loading pressure on top of the main valve diaphragm and decreased downstream pressure under the main valve diaphragm force the main valve diaphragm and stem downward. This

opens the main valve plug, and increases flow to the downstream system thus restoring downstream pressure to the setting of the pilot regulator spring.

When downstream pressure increases, it registers under the pilot diaphragm and overcomes the force of the pilot spring. This allows the pilot valve spring to close the pilot valve plug and causes excess loading pressure to bleed to the downstream system through the pilot bleed hole. At the same time, increased downstream pressure registers under the main valve diaphragm. The decreased loading pressure on top of the main valve diaphragm and increased downstream pressure under the main valve diaphragm force the main valve diaphragm upward. This allows the main valve plug spring close to the main valve plug, reducing flow to the downstream system.

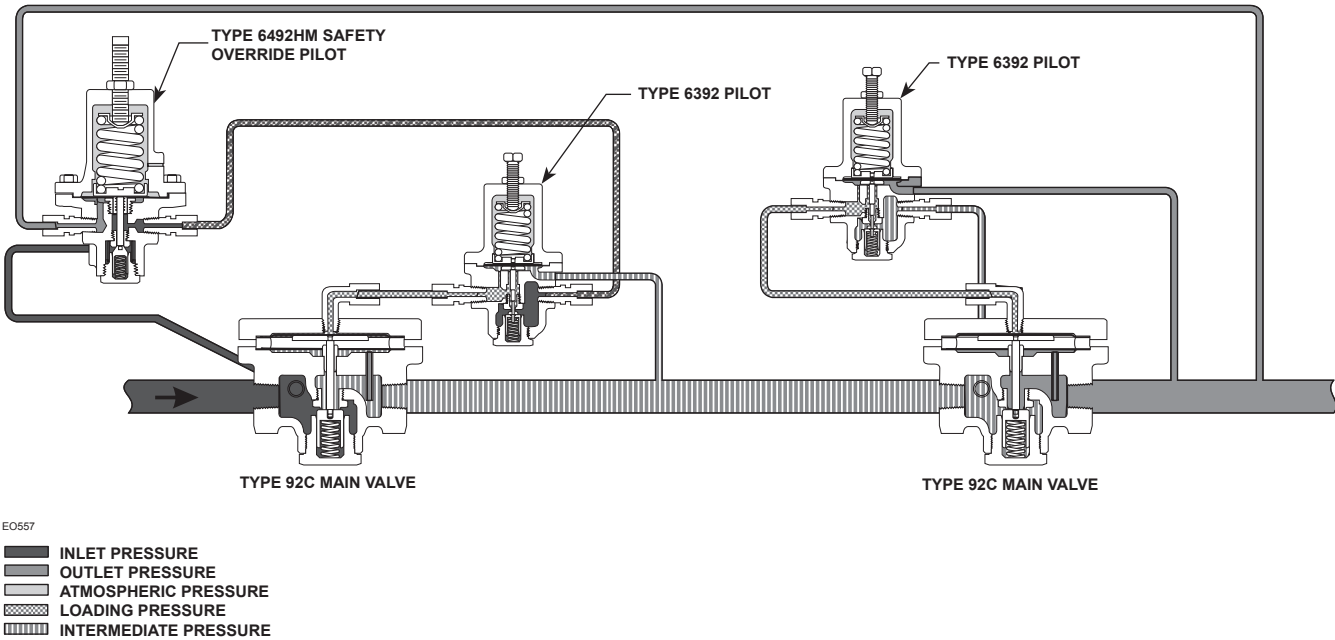


Figure 4. Type 92C with Type 6492HM Safety Override Pilot Operational Schematic

Table 4. Type 6492 Safety Override Pilot Spring Ranges and Minimum Differential Pressures

TYPE	SPRING RANGES, PSIG (bar)	SPRING COLOR	MINIMUM PRESSURE AT WHICH MONITORING PILOT CAN BE SET, PSIG (bar)
6492HM	10 to 30 (0,69 to 2,1)	Yellow	5 (0,34) over normal distribution pressure
	25 to 75 (1,7 to 5,2)	Green	10 (0,69) over normal distribution pressure
	70 to 150 (4,8 to 10,3)	Red	
6492HTM	80 to 250 (5,5 to 17,2)	Unpainted	---
	15 to 100 (1,0 to 6,9)		

Pressure-Loaded Regulator

Refer to the schematic in Figure 3. With a pressure-loaded regulator, a remote, adjustable loading regulator provides loading pressure to the top of the main valve diaphragm. Downstream pressure registers under the main valve diaphragm through the pilot tube.


When downstream pressure decreases, it registers under the diaphragm and allows the stem and plug to move downward, thereby opening the valve to increase downstream pressure.

When downstream pressure increases, it registers under the diaphragm and forces the stem and plug to move upward. The upward force of the spring causes the valve to close, which decreases flow to the downstream system thus decreasing downstream pressure. In hot air service, supply air above the diaphragm becomes compressed and is vented to the atmosphere. If a steam supply is used, the steam is vented downstream.

Safety Override Pilot

Refer to the schematic in Figure 4. Once placed in operation, the upstream Type 6392 pilot senses the intermediate pressure between both valves, and the Type 6492HM or 6492HTM pilot senses downstream pressure of the second valve. As demand for flow increases, intermediate pressure will fall causing the Type 6392 pilot to open. As the Type 6392 pilot valve opens, loading pressure to the main valve increases, opening the main valve.

The Type 6492HM or 6492HTM safety override pilot remains open because its setpoint is above the setpoint of the downstream valve. In the unlikely event that the downstream valve fails open, downstream pressure will rise above the downstream valve’s setpoint. This pressure is sensed by the Type 6492HM or 6492HTM safety override pilot. As downstream pressure increases the safety override pilot closes, reducing loading pressure to the main

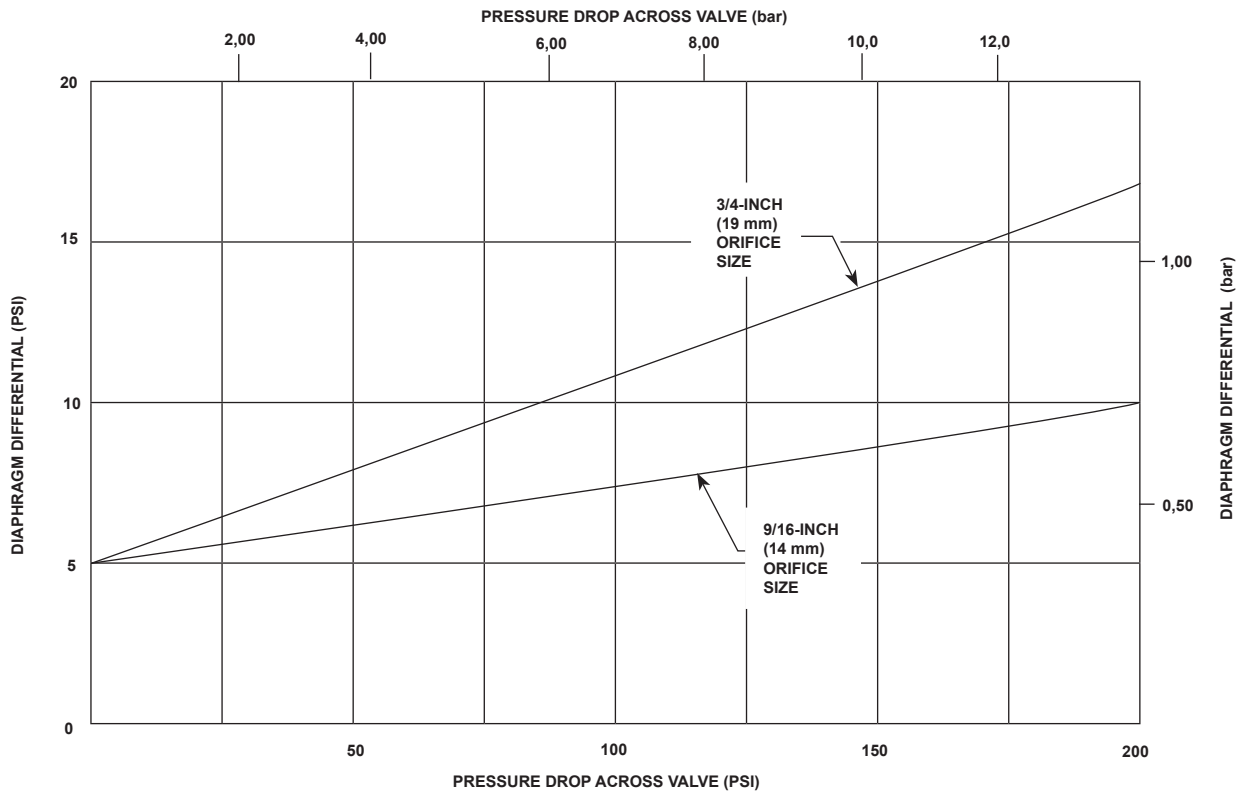

26A3808-A
A2508-2

NOTE:
TO DETERMINE REQUIRED LOADING PRESSURE, ADD THE
DIAPHRAGM DIFFERENTIAL PRESSURE TO THE DESIRED
OUTLET PRESSURE SETTING

Figure 5. Diaphragm Differential Pressure for Pressure-Loaded Regulator

valve, which positions the main valve to maintain downstream pressure as specified per ASME Boiler and Pressure Vessel Code, Section VIII.

In the event that the upstream valve fails, the downstream regulator will prevent downstream pressure from rising above safe operating levels.

It is recommended to install some type of warning system, such as a sentinel relief valve, to warn the operator that a valve has failed in the system. This will prevent prolonged operation with one valve, which could cause valve trim wear and noise associated with operation at high differential pressures.

When operating in most steam systems, valve setpoints should be in strict accordance to ASME Boiler and Pressure Vessel Code, Section VIII. The Type 6492HM or 6492HTM safety override pilot should be set at 10 psig (0.69 bar) or 10% above maximum downstream operating pressure of the second valve, whichever pressure is greater. For example, most HVAC systems operate at 15 psig (1.0 bar), so the safety override pilot should be set no higher than 25 psig (1.7 bar).

Installation

The Type 92C regulator should be installed and used in accordance with federal, state, and local codes and regulations. Downstream overpressure protection should be provided by the user if the maximum inlet pressure exceeds the downstream pressure of the system. The pressure and temperature limitations in the Specifications section must be observed.

The Type 92C regulator may be installed in any orientation. However, on steam service the regulator should not be installed at the bottom of a tall vertical pipeline where condensate could collect and create a pressure head affecting regular performance.

A downstream control line is required for pilot-operated regulators; the control line is not furnished with the regulator. An adjustable loading pressure regulator and loading pressure piping are required for pressure-loaded regulators.

Capacity Information

Steam Capacities

Typical regulating capacities in pounds of saturated steam per hour are shown in Table 5 for pilot-operated regulators. A typical performance curve is shown in Figure 6. To determine capacities for pressure-loaded regulators, multiply the appropriate Table 5 value by the capacity factor listed in Table 7.

1. If the steam is saturated and the pressure drop across the regulator is critical (absolute outlet pressure equal to approximately one-half or less of the absolute inlet pressure), use the equation:

$$Q = (P_{1abs}) (C_s)$$

where,

Q = Maximum flow capacity, pounds of saturated steam per hour

P_{1abs} = Absolute inlet pressure (gauge inlet pressure plus 14.7 psi)

C_s = Wide-open steam sizing coefficient (see Specifications section)

To convert capacity to kilograms per hours, multiply the capacity pounds per hour by 0.4536.

2. If the steam is superheated or if the pressure drop across the regulator is lower than critical (absolute outlet pressure greater than approximately one-half the absolute inlet pressure), use the sizing nomographs in Catalog 10.

Liquid Capacities

Table 6 gives regulating capacities in U.S. gallons per minute of water and in cubic meters per hour of water. To determine capacities for pressure-loaded regulators, multiply the approximate Table 6 value by the capacity factor listed in Table 7.

To determine regulating capacities at pressure settings not given in Table 6, or to determine wide-open capacities for relief sizing at any inlet pressure, use the Catalog 10 liquid sizing procedures in conjunction with the appropriate liquid coefficients (C_v and K_m , see Specifications section).

Liquid Sizing for Liquids Other than Water

Where,

$$Q = C_v \sqrt{\frac{\Delta P}{G}}$$

Q = Flow in GPM

ΔP = Valve differential in psi

C_v = Valve sizing coefficient (see Table 6)

G = Specific Gravity

Example,

NPS 1 (DN 25) body

3/4-inch (19 mm) orifice size

Glycol (Specific Gravity) = 1.11

P_{inlet} = 150 psig (10,3 bar)

P_{out} (setpoint) = 50 psig (3,4 bar)

Capacity based on 10% Droop from setpoint

P_{out} at full flow = 50 psi (3,4 bar) setpoint - 5 psi (0,35 bar) Droop = 45 psi (3,1 bar)

ΔP = 150 - 45 = 105 psi (7,2 bar)

C_v = 6.89 from Table 6

$$Q = 6.89 \sqrt{\frac{105}{1.11}}$$

= 67.0 GPM (253,60 l/min) Glycol

Maximum Allowable Pressure Drop for Liquid Service

Pressure drops in excess of allowable will result in choked flow and possible cavitation damage.

Choked flow is the formation of vapor bubbles in the liquid flow stream causing a crowding condition at the vena contracta which tends to limit flow through the regulator. The vena contracta is the minimum cross-sectional area of the flow stream occurring just downstream of the actual physical restriction.

Cavitation and flashing are physical changes in the process fluid. The change is from the liquid state to the vapor state and results from the increase in fluid velocity at or just downstream of the greatest flow restriction, normally the regulator orifice.

To determine the maximum allowable pressure drop for water:

$$\Delta P_{(allow)} = K_m (P_1)$$

Where,

ΔP = Valve differential — psi

K_m = Valve recovery coefficient from Table 7

P_1 = Valve inlet pressure psia

To determine maximum allowable pressure drop for fluids other than water, see Fisher® Catalog 10.

Table 5. Steam Flow Capacities for Pilot-Operated Type 92C Regulator⁽¹⁾ (Based on 10 Percent Proportional Band)

OUTLET PRESSURE SETTING		INLET PRESSURE		CAPACITY (POUNDS PER HOUR ⁽²⁾ (Kg/h) OF SATURATED STEAM)				
				NPS 1/2 (DN 15) Main Valve	NPS 3/4 (DN 20) Main Valve		NPS 1 (DN 25) Main Valve	
Psig	Bar	Psig	Bar	9/16-Inch (14 mm) Orifice Size	Standard 3/4-Inch (19 mm) Orifice Size	Optional 9/16-Inch (14 mm) Orifice Size	Standard 3/4-Inch (19 mm) Orifice Size	Optional 9/16-Inch (14 mm) Orifice Size
5 ⁽³⁾	0,34 ⁽³⁾	20	1,4	170 (77,1)	230 (104)	180 (81,7)	300 (136)	200 (90,7)
		25	1,7	200 (90,7)	280 (127)	210 (95,3)	380 (172)	230 (104)
		30	2,1	240 (109)	340 (154)	270 (122)	410 (186)	280 (127)
		50	3,4	250 (113)	440 (200)	310 (141)	680 (308)	410 (186)
		75	5,2	370 (168)	590 (268)	450 (204)	880 (399)	500 (227)
		100	6,9	370 (168)	710 (322)	500 (227)	980 (445)	600 (272)
10 ⁽³⁾	0,69 ⁽³⁾	150	10,3	400 (181)	740 (336)	560 (254)	1000 (454)	660 (299)
		25	1,7	210 (95,3)	300 (136)	220 (99,8)	360 (163)	250 (113)
		30	2,1	240 (109)	390 (177)	280 (127)	430 (195)	300 (136)
		50	3,4	360 (163)	600 (272)	410 (186)	680 (308)	450 (204)
		75	5,2	400 (181)	680 (308)	500 (227)	900 (408)	580 (263)
		100	6,9	550 (249)	830 (376)	680 (308)	1100 (499)	770 (349)
15 ⁽³⁾	1,0 ⁽³⁾	150	10,3	600 (272)	880 (399)	710 (322)	1150 (522)	800 (363)
		30	2,1	220 (99,8)	350 (159)	260 (118)	410 (186)	280 (127)
		50	3,4	380 (172)	610 (277)	430 (195)	720 (327)	480 (218)
		75	5,2	480 (218)	800 (363)	570 (259)	930 (422)	620 (281)
		100	6,9	620 (281)	960 (435)	750 (340)	1250 (567)	830 (376)
		150	10,3	650 (295)	1100 (499)	780 (354)	1300 (590)	880 (399)
20 ⁽³⁾	1,4 ⁽³⁾	35	2,4	240 (109)	370 (168)	270 (122)	420 (191)	290 (132)
		50	3,4	380 (172)	630 (286)	430 (195)	720 (327)	480 (218)
		75	5,2	550 (249)	870 (395)	630 (286)	950 (431)	670 (304)
		100	6,9	700 (318)	1150 (522)	800 (363)	1300 (590)	900 (408)
		150	10,3	800 (363)	1200 (544)	900 (408)	1400 (635)	1000 (454)
		200	13,8	1000 (454)	-----	1150 (522)	-----	1300 (590)
30 ⁽³⁾	2,1 ⁽³⁾	50	3,4	330 (150)	550 (249)	400 (181)	570 (259)	450 (204)
		75	5,2	550 (249)	880 (399)	630 (286)	950 (431)	670 (304)
		100	6,9	700 (318)	1150 (522)	800 (363)	1300 (590)	900 (408)
		150	10,3	950 (431)	1400 (635)	1100 (499)	1600 (726)	1200 (544)
		200	13,8	1000 (454)	-----	1200 (544)	-----	1400 (635)
40 ⁽³⁾	2,8 ⁽³⁾	55	3,8	330 (150)	560 (254)	400 (181)	580 (263)	430 (195)
		60	4,1	390 (177)	610 (277)	450 (204)	670 (304)	480 (218)
		75	5,2	480 (218)	870 (395)	600 (272)	930 (422)	660 (299)
		100	6,9	700 (318)	1150 (522)	800 (363)	1300 (590)	900 (408)
		150	10,3	1000 (454)	1400 (635)	1150 (522)	1700 (771)	1250 (567)
		200	13,8	1100 (499)	-----	1300 (590)	-----	1500 (680)
50	3,4	250 ⁽⁴⁾	17,2	1300 (590)	-----	1550 (703)	-----	1700 (771)
		65	4,5	370 (168)	600 (272)	440 (200)	650 (295)	470 (213)
		75	5,2	480 (218)	740 (336)	550 (249)	820 (372)	600 (272)
		100	6,9	700 (318)	1100 (499)	800 (363)	1250 (567)	850 (386)
		150	10,3	1000 (454)	1500 (680)	1200 (544)	1900 (862)	1300 (590)
		200	13,8	1200 (544)	1800 (816)	1350 (612)	2300 (1043)	1600 (726)
60	4,1	250 ⁽⁴⁾	17,2	1400 (635)	-----	1700 (771)	-----	1850 (839)
		75	5,2	360 (163)	630 (286)	400 (181)	740 (336)	450 (204)
		80	5,5	430 (195)	700 (318)	500 (227)	850 (386)	550 (249)
		100	6,9	640 (290)	1000 (454)	700 (318)	1200 (544)	800 (363)
		150	10,3	1000 (454)	1500 (680)	1200 (544)	1900 (862)	1300 (590)
		200	13,8	1200 (544)	2000 (907)	1500 (680)	2600 (1179)	1700 (771)
80	5,5	250 ⁽⁴⁾	17,2	1500 (680)	-----	1800 (816)	-----	2000 (907)
		100	6,9	500 (227)	900 (408)	620 (281)	950 (431)	730 (331)
		150	10,3	1000 (454)	1500 (680)	1200 (544)	1800 (816)	1200 (544)
		200	13,8	1300 (590)	2000 (907)	1500 (680)	2500 (1134)	1700 (771)
		250	17,2	1500 (680)	-----	1800 (816)	-----	2000 (907)

1. To determine capacities for pressure-loaded Type 92C regulators, multiply the printed value by the appropriate value shown in Table 7.
2. To convert capacity to kg/hr, multiply by 0.4536.
3. Capacities for outlet pressure settings lower than 50 psig (3,4 bar) are based on a 2 to 1 ratio of outlet pipe size to main valve body size.
4. 20 to 150 psig (1,4 to 10,3 bar) pilot control spring only (red spring 1E392727142).

- continued -

Bulletin 71.2:92C

Table 5. Steam Flow Capacities for Pilot-Operated Type 92C Regulator⁽¹⁾ (Based on 10 Percent Proportional Band) (continued)

OUTLET PRESSURE SETTING		INLET PRESSURE		CAPACITY (POUNDS PER HOUR ⁽²⁾ (Kg/h) OF SATURATED STEAM)				
				NPS 1/2 (DN 15) Main Valve	NPS 3/4 (DN 20) Main Valve		NPS 1 (DN 25) Main Valve	
Psig	Bar	Psig	Bar	9/16-Inch (14 mm) Orifice Size	Standard 3/4-Inch (19 mm) Orifice Size	Optional 9/16-Inch (14 mm) Orifice Size	Standard 3/4-Inch (19 mm) Orifice Size	Optional 9/16-Inch (14 mm) Orifice Size
100	6,9	125	8,6	600 (272)	1000 (454)	750 (340)	1100 (499)	850 (386)
		150	10,3	850 (386)	1500 (680)	1000 (454)	1600 (726)	1200 (544)
		200	13,8	1300 (590)	2200 (998)	1600 (726)	2400 (1089)	1700 (771)
		250	17,2	1600 (726)	2400 (1089)	2000 (907)	3000 (1361)	2100 (953)
		300	20,7	2000 (907)	----	2400 (1089)	----	2500 (1134)
125	8,6	150	10,3	700 (318)	1000 (454)	800 (363)	1200 (544)	850 (386)
		200	13,8	1200 (544)	2100 (953)	1400 (635)	2200 (998)	1500 (680)
		250	17,2	1600 (726)	2400 (1089)	2000 (907)	3000 (1361)	2100 (953)
		300	20,7	2000 (907)	3000 (1361)	2400 (1089)	3600 (1633)	2500 (1134)
150	10,3	175	12,1	800 (363)	1100 (499)	900 (408)	1400 (635)	950 (431)
		200	13,8	1000 (454)	2000 (907)	1100 (499)	2000 (907)	1300 (590)
		250	17,2	1500 (680)	2300 (1043)	1800 (816)	2800 (1270)	1900 (862)
		300	20,7	2000 (907)	3000 (1361)	2400 (1089)	3600 (1633)	2500 (1134)

1. To determine capacities for pressure-loaded Type 92C regulators, multiply the printed value by the appropriate value shown in Table 7.
2. To convert capacity to kg/hr, multiply by 0.4536.

Table 6. Water Flow Capacities and Regulating C_v Values for Type 92C Regulator⁽¹⁾ (Based on 10 Percent Proportional Band)

OUTLET PRESSURE SETTING		INLET PRESSURE		NPS 1/2 (DN 15) MAIN VALVE			NPS 3/4 (DN 20) MAIN VALVE						NPS 1 (DN 25) MAIN VALVE					
				9/16-Inch (14 mm) Orifice Size			Standard 3/4-Inch (19,3 mm) Orifice Size			Optional 9/16-Inch (14 mm) Orifice Size			Standard 3/4-Inch (19,1mm) Orifice Size			Optional 9/16-Inch (14 mm) Orifice Size		
Psig	Bar	Psig	Bar	GPM	m ³ /h	C _v	GPM	m ³ /h	C _v	GPM	m ³ /h	C _v	GPM	m ³ /h	C _v	GPM	m ³ /h	C _v
5 ⁽²⁾	0,34	20	1,4	12	2,73	3.13	17	3,86	4.23	13	2,95	3.31	22	5,00	5.62	14	3,18	3.68
		25	1,7	14	3,18	3.11	20	4,54	4.36	15	3,40	3.27	27	6,13	5.91	16	3,63	3.58
		30	2,1	16	3,63	3.26	23	5,22	4.61	19	4,32	3.66	28	6,36	5.56	19	4,32	3.80
		50	3,4	15	3,41	2.28	27	6,13	4.02	19	4,32	2.83	42	9,54	6.21	25	5,68	3.75
		75	5,2	20	4,54	2.43	32	7,27	3.87	25	5,68	2.95	48	10,90	5.77	28	6,36	3.28
		100	6,9	19	4,32	1.90	36	8,18	3.64	25	5,68	2.56	49	11,14	5.03	30	6,81	3.08
		150	10,3	17	3,86	1.43	32	7,27	2.64	24	5,45	2.00	43	9,77	3.57	28	6,36	2.36
10 ⁽²⁾	0,69	25	1,7	14	3,18	3.47	20	4,54	4.95	15	3,40	3.63	24	5,45	5.94	17	3,86	4.13
		30	2,1	16	3,63	3.39	25	5,68	5.50	18	4,10	3.95	28	6,36	6.07	19	4,32	4.23
		50	3,4	21	4,77	3.32	35	7,95	5.54	24	5,45	3.79	40	9,10	6.28	27	6,13	4.15
		75	5,2	21	4,77	2.63	36	8,18	4.47	27	6,13	3.29	48	11,00	5.91	31	7,04	3.81
		100	6,9	27	6,13	2.82	41	9,31	4.26	33	7,50	3.49	54	12,27	5.64	38	8,63	3.95
		150	10,3	25	5,68	2.14	37	8,40	3.14	30	6,81	2.54	49	11,14	4.11	34	7,72	2.86
15 ⁽²⁾	1,0	30	2,1	13	2,95	3.31	21	4,77	5.26	16	3,63	3.91	25	5,68	6.17	17	3,86	4.21
		50	3,4	22	5,00	3.57	35	7,95	5.73	24	5,45	4.04	41	9,31	6.76	27	6,13	4.51
		75	5,2	25	5,68	3.17	41	9,31	5.28	30	6,81	3.76	48	10,91	6.14	32	7,27	4.09
		100	6,9	30	6,81	3.18	46	10,50	4.93	36	8,18	3.85	60	13,64	6.42	40	9,10	4.26
		150	10,3	27	6,13	2.32	46	10,50	3.93	33	7,50	2.79	54	12,27	4.64	37	8,40	3.14
20 ⁽²⁾	1,4	35	2,4	14	3,18	3.32	21	4,77	5.12	15	3,41	3.74	24	5,45	5.81	17	3,86	4.01
		50	3,4	21	4,77	3.66	34	7,72	6.07	23	5,22	4.14	39	8,86	6.94	26	5,91	4.62
		75	5,2	28	6,36	3.66	44	10,00	5.79	32	7,27	4.19	48	10,91	6.32	34	7,72	4.46
		100	6,9	33	7,50	3.60	54	12,27	5.92	37	8,40	4.12	61	13,87	6.69	42	9,54	4.63
		150	10,3	33	7,50	2.86	49	11,14	4.29	37	8,40	3.21	57	12,96	5.00	41	9,31	3.57
		200	13,8	37	8,40	2.74	----	----	----	43	9,77	3.15	----	----	----	48	10,91	3.56

1. To determine capacities for pressure-loaded Type 92C regulators, multiply the printed value by the appropriate value shown Table 7.
2. Capacities for outlet pressure settings lower than 50 psig (3,4 bar) are based on a 2 to 1 ratio of outlet pipe size to main valve body size.

- continued -

Table 6. Water Flow Capacities and Regulating C_v Values for Type 92C Regulator⁽¹⁾ (Based on 10 Percent Proportional Band) (continued)

OUTLET PRESSURE SETTING		INLET PRESSURE		NPS 1/2 (DN 15) MAIN VALVE			NPS 3/4 (DN 20) MAIN VALVE						NPS 1 (DN 25) MAIN VALVE					
Psig	Bar	Psig	Bar	9/16-Inch (14 mm) Orifice Size			Standard 3/4-Inch (19 mm) Orifice Size			Optional 9/16-Inch (14 mm) Orifice Size			Standard 3/4-Inch (19 mm) Orifice Size			Optional 9/16-Inch (14 mm) Orifice Size		
				GPM	m ³ /h	C_v	GPM	m ³ /h	C_v	GPM	m ³ /h	C_v	GPM	m ³ /h	C_v	GPM	m ³ /h	C_v
30 ⁽²⁾	2,1	50	3,4	17	3,86	3.47	28	6,36	5.78	20	4,54	4.20	29	6,59	5.99	23	5,22	4.73
		75	5,2	26	6,00	3.78	42	9,54	6.02	30	6,81	4.31	45	10,23	6.50	32	7,27	4.58
		100	6,9	31	7,04	3.66	51	11,59	5.99	36	8,18	4.16	58	13,18	6.77	40	9,09	4.68
		150	10,3	38	8,63	3.40	56	12,73	5.01	44	10,00	3.93	63	14,32	5.72	48	10,91	4.29
		200	13,8	36	8,18	2.74	----	----	----	43	9,77	3.29	----	----	----	50	11,36	3.84
40 ⁽²⁾	2,8	55	3,8	15	3,41	3.51	26	5,91	5.96	19	4,32	4.26	27	6,13	6.17	20	4,54	4.58
		60	4,1	18	4,09	3.66	28	6,36	6.73	21	4,77	4.23	31	7,04	6.29	22	5,00	4.51
		75	5,2	21	4,77	3.44	39	8,86	6.23	27	6,13	4.30	42	9,54	6.66	30	6,81	4.73
40 ⁽²⁾	2,8	100	6,9	30	6,81	3.72	49	11,14	6.10	34	7,72	4.25	55	12,50	6.90	38	8,63	4.78
		150	10,3	38	8,63	3.59	54	12,27	5.03	44	10,00	4.13	65	14,77	6.11	48	10,91	4.49
		200	13,8	39	8,86	3.02	----	----	----	46	10,46	3.58	----	----	----	53	12,05	4.11
		250	17,2	42	9,54	2.89	----	----	----	50	11,36	3.44	----	----	----	55	12,50	3.78
50	3,4	65	4,5	16	3,63	3.55	26	5,91	5.75	19	4,32	4.22	28	6,36	6.23	20	4,54	4.51
		75	5,2	20	4,54	3.71	31	7,04	5.71	23	5,22	4.25	35	7,95	6.33	25	5,68	4.63
		100	6,9	28	6,36	3.83	45	10,23	6.02	32	7,27	4.38	51	11,59	6.84	34	7,72	4.65
		150	10,3	37	8,40	3.62	56	12,73	5.44	45	10,23	4.35	71	16,14	6.89	48	10,91	4.71
		200	13,8	41	9,31	3.30	62	14,09	4.95	46	10,46	3.71	79	17,96	6.32	55	12,50	4.40
		250 ⁽³⁾	17,2	45	10,23	3.11	----	----	----	54	12,27	3.78	----	----	----	59	13,41	4.11
60	4,1	75	5,2	14	3,18	3.15	25	5,68	5.51	16	3,63	3.50	30	6,81	6.47	18	4,10	3.93
		80	5,5	17	3,86	3.36	28	6,36	5.47	20	4,54	3.91	34	7,72	6.64	22	5,00	4.30
		100	6,9	25	5,68	3.66	39	8,86	5.72	27	6,13	4.01	47	10,68	6.87	31	7,04	4.58
		150	10,3	36	8,18	3.67	54	12,27	5.50	43	9,77	4.40	68	15,46	6.97	47	10,68	4.77
		200	13,8	40	9,09	3.31	67	15,23	5.52	50	11,36	4.14	87	19,78	7.18	57	12,96	4.69
		250 ⁽³⁾	17,2	47	10,68	3.34	----	----	----	56	12,73	4.01	----	----	----	62	14,09	4.45
80	5,5	100	6,9	18	4,09	3.36	32	7,27	6.06	22	5,00	4.17	36	8,18	6.39	26	6,00	4.91
		150	10,3	34	7,72	3.82	51	11,59	5.73	41	9,31	4.59	61	13,86	6.88	41	9,31	4.59
		200	13,8	41	9,31	3.65	63	14,32	5.61	48	10,91	4.21	79	17,96	7.01	54	12,27	4.77
		250	17,2	45	10,23	3.36	----	----	----	54	12,27	4.04	----	----	----	60	13,64	4.48
100	6,9	125	8,6	19	4,32	3.28	32	7,27	5.47	24	5,45	4.10	38	8,64	6.02	28	6,36	4.65
		150	10,3	27	6,13	3.48	48	10,91	6.15	32	7,27	4.10	51	11,59	6.56	38	8,63	4.92
		200	13,8	39	8,86	3.75	67	15,23	6.34	48	10,91	4.61	73	16,59	6.92	51	11,59	4.90
		250	17,2	46	10,46	3.63	69	15,68	5.45	57	12,96	4.54	86	19,55	6.81	60	13,64	4.77
		300	20,7	55	12,50	3.77	----	----	----	66	15,00	4.53	----	----	----	68	15,46	4.72
125	8,6	150	10,3	21	4,77	3.37	29	6,59	4.81	24	5,45	3.85	35	7,95	5.77	25	5,68	4.09
		200	13,8	34	7,72	3.65	60	13,64	6.39	40	9,10	4.26	63	14,32	6.70	43	9,77	4.57
		250	17,2	44	10,00	3.73	66	15,00	5.59	55	12,50	4.66	82	18,64	6.99	57	12,96	4.90
		300	20,7	52	11,82	3.83	79	17,96	5.74	63	14,32	4.59	94	21,37	6.89	66	15,00	4.79
150	10,3	175	12,1	22	5,00	3.44	30	6,81	4.73	24	5,45	3.87	38	8,63	6.02	26	6,00	4.08
		200	13,8	27	6,13	3.33	54	12,27	6.67	30	6,81	3.67	54	12,27	6.67	35	7,95	4.33
		250	17,2	39	8,86	3.64	60	13,64	5.58	47	10,68	4.37	73	16,59	6.80	49	11,14	4.61
		300	20,7	50	11,36	3.91	75	17,05	5.87	60	13,64	4.70	91	20,68	7.05	63	14,32	4.89

1. To determine capacities for pressure-loaded Type 92C regulators, multiply the printed value by the appropriate value shown Table 7.
2. Capacities for outlet pressure settings lower than 50 psig (3,4 bar) are based on a 2 to 1 ratio of outlet pipe size to main valve body size.
3. 20 to 150 psig (1,4 to 10,3 bar) pilot control spring only (red spring 1E392727142).



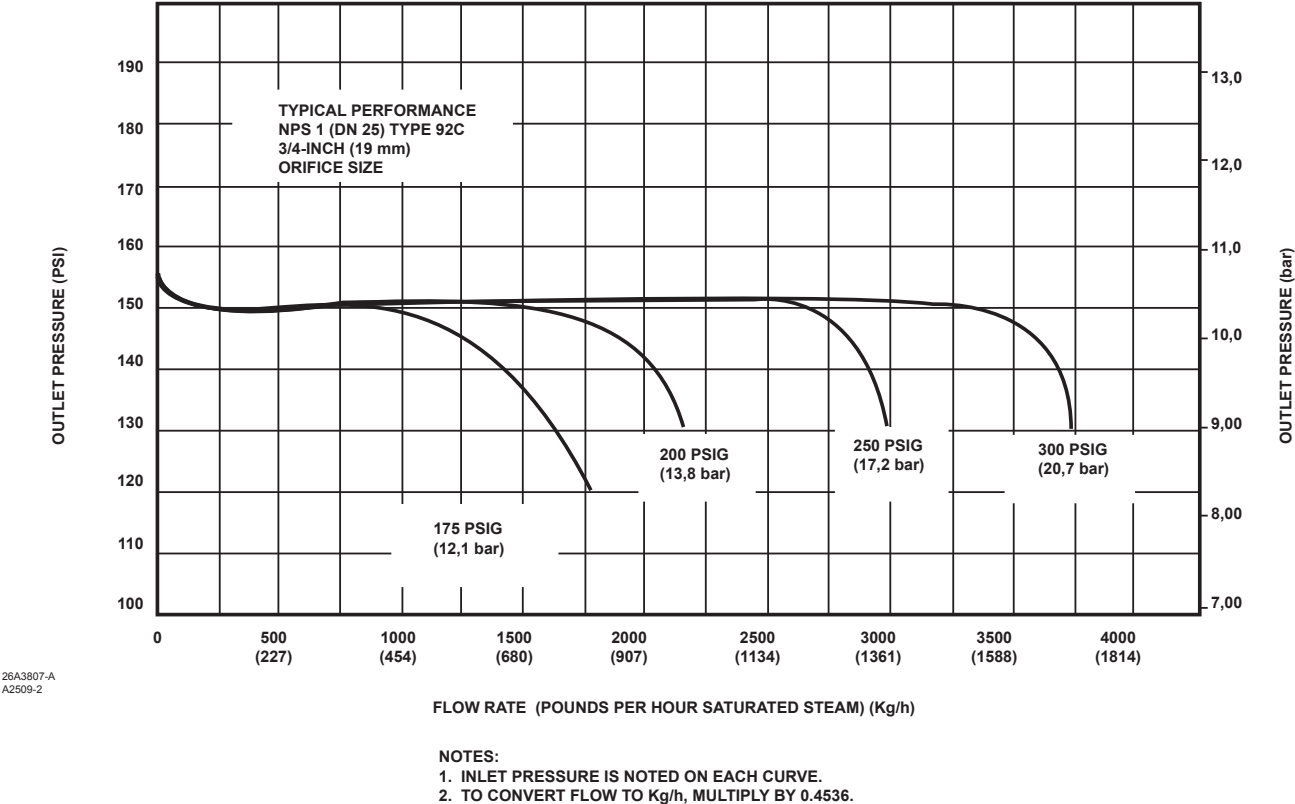


Figure 6. Typical Performance Curve for Pilot-Operated Regulator

Table 7. Capacity Factors for Pressure-Loaded Type 92C Regulators with 3 to 5 psi (0,21 to 0,35 bar) Droop

MAIN VALVE SIZE, NPS (DN)	ORIFICE SIZE		CAPACITY FACTOR FOR PRESSURE LOADED REGULATORS
	Inch	mm	
1/2 (15)	9/16	14	0.50
3/4 (20)	9/16	14	0.65
	3/4	19	0.60
1 (25)	9/16	14	0.80
	3/4	19	0.75

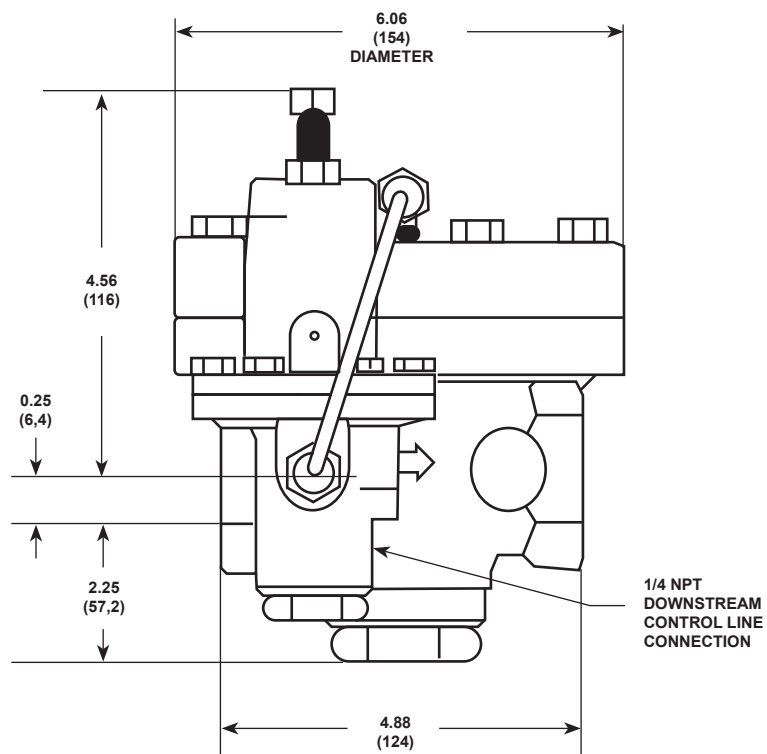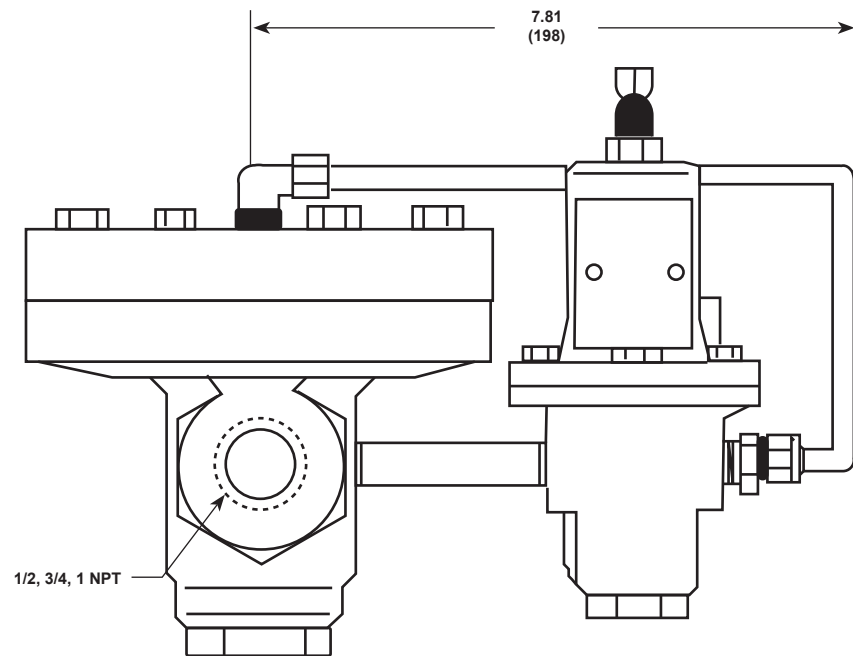

INCHES
(mm)

16A3176-D
A2512-2

Figure 7. Dimensions

Ordering Information

When ordering, specify:

Application

1. Range of temperatures
2. Range of inlet pressures (maximum, normal, minimum)
3. Outlet pressure setting
4. Range of flow rates (maximum, normal, minimum controlled)
5. Body size
6. Alternate materials offered in Specification section.

Ordering Guide

Type (Select One)

- ☐ 92C Pilot-operated
- ☐ 92C Pressure loaded
- ☐ 92C with Safety Override Pilot

Body Size (Select One)

- ☐ NPS 1/2 (DN 15)***
- ☐ NPS 3/4 (DN 20)***
- ☐ NPS 1 (DN 25)***

Body Material and End Connection Style (Select One)

Cast iron

- ☐ NPT***

WCC Steel

- ☐ NPT***
- ☐ CL150 RF**
- ☐ CL300 RF**
- ☐ PN 16/25/40*

Stainless steel

- ☐ NPT**
- ☐ CL150 RF**
- ☐ CL300 RF**
- ☐ PN 16/25/40*

Regulator

Refer to the Specifications section on pages 2 and 3. Review the descriptions to the right of each specification and indicate the desired choice wherever there is a selection to be made.

Be sure to specify the type of regulator desired (pilot-operated Type 92C regulator with Type 6392 pilot or pressure-loaded Type 92C regulator without pilot). Refer to separate bulletins for information on loading regulators for use with pressure-loaded Type 92C regulators.

Orifice Size (Select One)

- ☐ 9/16-inch (14 mm)***
- ☐ 3/4-inch (19 mm) [not available for NPS 1/2 (DN 15) body size]***

Seat Construction (Select One)

- ☐ 416 Stainless steel metal seat***
- ☐ Ethylenepropylene (EPR) seat**

Gaskets (Select One)

- ☐ Composition [up to 500°F (260°C)]***
- ☐ Graphite [over 500°F (260°C)]**

Tubing and Fittings (Select One)

- ☐ Copper tubing and brass fittings***
- ☐ Stainless steel tubing and fittings**

Outlet Pressure Range (Select One)

Standard Spring

- ☐ 5 to 70 psig (0,34 to 4,8 bar)***
- ☐ 20 to 150 psig (1,4 to 10,3 bar)***

Spring for Use Over 500°F (260°C)

- ☐ 15 to 100 psig (1,0 to 6,9 bar)***
- ☐ 80 to 250 psig (5,5 to 17,2 bar)***

- continued -

Ordering Guide (continued)

Override Pilot Spring Ranges (if applicable) (Select One)

Type 6492HM

- ☐ 10 to 30 psig (0,69 to 2,1 bar)
- ☐ 25 to 75 psig (1,7 to 5,2 bar)
- ☐ 70 to 150 psig (4,83 to 10,3 bar)

Type 6492HTM

- ☐ 15 to 100 psig (1,0 to 6,9 bar)
- ☐ 80 to 250 psig (5,5 to 17,2 bar)

Pressure Loading Supply (Optional)

- ☐ Yes (Type 670 panel loader)**

Main Valve Replacement Parts Kit (Optional)

- ☐ Yes, send one replacement parts kit to match this order.

Pilot Replacement Parts Kit (Optional)

- ☐ Yes, send one replacement parts kit to match this order.

Regulators Quick Order Guide	
***	Standard - Readily Available for Shipment
**	Non-Standard - Allow Additional Time for Shipment
*	Special Order, Constructed from Non-Stocked Parts. Consult your local Sales Office for Availability.
Availability of the product being ordered is determined by the component with the longest shipping time for the requested construction.	

Steam Specification Worksheet			
Application:			
Tag Number: _____			
Valve Type:	☐ Direct-Operated	☐ Pilot-Operated	
	☐ Pressure loaded	☐ Differential	
Body Material:	☐ Steel	☐ Iron	☐ Stainless steel
Inlet/Outlet End Connection Style:	☐ NPT ☐ CL150 RF Flange ☐ CL250 RF Flange ☐ CL300 RF Flange ☐ CL600 RF Flange ☐ PN 16/25/40		
Inlet/Outlet Pipe Size:	_____ Inches (mm)		
Steam Conditions:			
Inlet Pressure (psig/bar)	Maximum	Normal	Minimum
Inlet Temperature (°F/°C)			
Outlet Pressure (psig/bar)			
Flow (pounds/h or kg/h)			
Performance Required:			
Accuracy Requirements: ☐ ≤10% ☐ ≤20% ☐ ≤30% ☐ ≤40%			

Industrial Regulators

Emerson Process Management Regulator Technologies, Inc.

USA - Headquarters
McKinney, Texas 75069-1872 USA
Tel: 1-800-558-5853
Outside U.S. 1-972-548-3574

Asia-Pacific
Shanghai, China 201206
Tel: +86 21 2892 9000

Europe
Bologna, Italy 40013
Tel: +39 051 4190611

Middle East and Africa
Dubai, United Arab Emirates
Tel: +971 4811 8100

Natural Gas Technologies

Emerson Process Management Regulator Technologies, Inc.

USA - Headquarters
McKinney, Texas 75069-1872 USA
Tel: 1-800-558-5853
Outside U.S. 1-972-548-3574

Asia-Pacific
Singapore, Singapore 128461
Tel: +65 6777 8211

Europe
Bologna, Italy 40013
Tel: +39 051 4190611
Gallardon, France 28320
Tel: +33 (0)2 37 33 47 00

TESCOM

Emerson Process Management Tescom Corporation

USA - Headquarters
Elk River, Minnesota 55330-2445 USA
Tel: 1-763-241-3238

Europe
Selmsdorf, Germany 23923
Tel: +49 (0) 38823 31 0

For further information visit www.fisherregulators.com

The Emerson logo is a trademark and service mark of Emerson Electric Co. All other marks are the property of their prospective owners. Fisher is a mark owned by Fisher Controls, Inc., a business of Emerson Process Management.

The contents of this publication are presented for informational purposes only, and while every effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding the products or services described herein or their use or applicability. We reserve the right to modify or improve the designs or specifications of such products at any time without notice.

Emerson Process Management does not assume responsibility for the selection, use or maintenance of any product. Responsibility for proper selection, use and maintenance of any Emerson Process Management product remains solely with the purchaser.